




LIFELITES
Micro Lighting Products

eLite Advanced 2

LED Lighting Effects Kit


Included in this kit :

eLite Advanced MCU with 25 Patterns • LED Cables • Battery Box

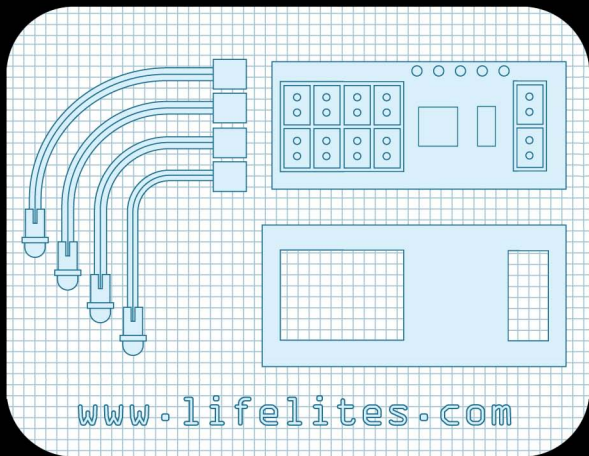

Bring your models to life with products from

www.lifelites.com

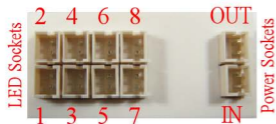

Getting started:

There are 8 polarized LED sockets on one end of the eLite Advanced MCU and 2 polarized power sockets on other end. To connect a plug into a socket, align the plug tabs with the socket slots. Make sure the pins are aligned and press the plug into the socket. To remove the plug from the socket, gently pull the plug from the socket by the plug housing. Never pull a cable out of a socket by pulling on the wires as this could damage the cable. Insert two AAA batteries into the battery box. Turn the unit on and off with the switch on the battery box.

You can daisy chain units together by connecting an eLite jumper cable from an unused power socket of the main unit to an unused power socket of an additional unit. Do not daisy chain more than four units together.

Accessing different patterns and speeds:

There is an interface button recessed in the bottomside of the unit near the power sockets.

To access a pattern listed below these instructions, do the following steps:

- Hold the interface button down until output 1 and 2 flashes the current pattern number. Output 1 will light up at 10% brightness to indicate the unit is ready for first digit input.
- Press the button for the first digit of the pattern number, (i.e. press 4 times for 4).
- Wait for output 2 to light up at 10% brightness then repeat the button presses for the second digit of the pattern number. Unit will time out of pattern select mode when you are finished.
- Selected pattern number will flash on output 1 and 2 and then pattern will start automatically.

Most patterns have different speeds or brightnesses to choose from. To change speed of the current pattern, quickly press and release the button (not available during pattern selection).

Pattern List:

1-1 All on	2-1 Alternatne Fade	3-1 Machine Gun	4-1 Emerg. Vehicle
1-2 Marquee	2-2 Lighthouse 1	3-2 Fire	4-2 Locomotive
1-3 Bounce	2-3 Lighthouse 2	3-3 Arc Welder	4-2 Aircraft
1-4 Progressive	2-4 Lighthouse 3	3-4 Random Lights	4-4 Spacecraft
1-5 Fading Bounce	2-5 Radio/Cell Tower	3-5 Airport Runway	4-5 Engine Throb

Thank you for purchasing a LifeLites product from Brickmodder Labs! Your satisfaction is guaranteed and if you ever have any problems, comments, or concerns about any of our fine products, please contact customer service at support@lifelites.com.

This Product Requires Two AAA Batteries - Not Included